

MECHANICAL TIPPING CARGO BOXES

[A](#) [A](#) [A](#)



Cargo boxes are mounted on the tractor's three-point linkage and are used to transport materials used on the farm.

The design of the box allows filling of loose materials and self-unloading by releasing the hitch.




We offer a wide range of cargo boxes with mechanical tipping:

- cargo boxes LSŁ
- cargo boxes NSŁ
- load boxes SŁ
- cargo boxes FSŁ
- cargo boxes ISŁM
- mechanical cargo boxes

Skrzynia ładunkowa LSŁ






Typ/Type	Objęt. „m ³ ” Volume „m ³ ”	Szer. wewnętrzna Internal width	Masa kg Mass kg
LSŁ 1.0	0,42	1100	76
LSŁ 1.2	0,50	1200	82
LSŁ 1.5	0,62	1500	90
LSŁ 1.6	0,66	1600	93
LSŁ 1.8	0,75	1800	99

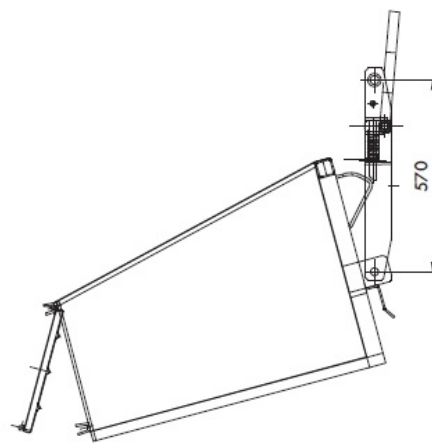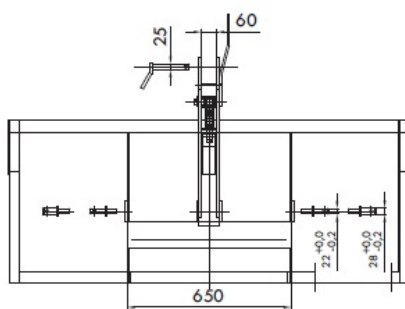

Skrzynia ładunkowa NSŁ




Typ/Type	Objęt. „m ³ ” Volume „m ³ ”	Szer. wewnętrzna Internal width	Masa kg Mass kg
NSŁ 1.1	0,50	1100	185
NSŁ 1.5	0,70	1500	216
NSŁ 1.6	0,75	1600	222
NSŁ 1.8	0,85	1800	236
NSŁ 1.9	0,90	1900	243
NSŁ 2.0	0,95	2000	250
NSŁ 2.2	1,00	2200	264

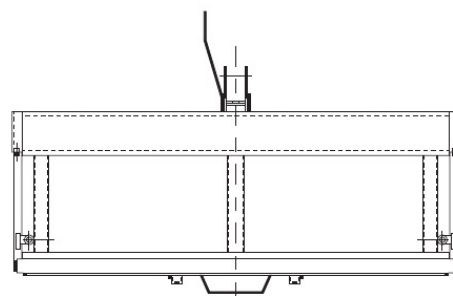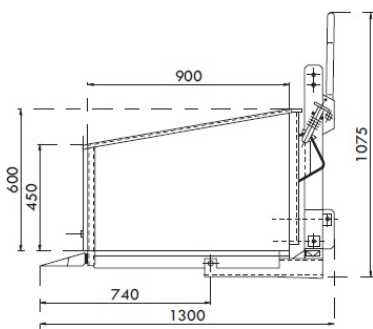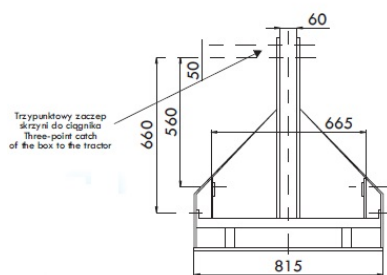


Skrzynia ładunkowa FSŁ




Typ/Type	Objęt. „m ³ ” Volume „m ³ ”	Szer. wewnętrzna Internal width	Masa kg Mass kg
FSŁ 1.1	0,63	1100	202
FSŁ 1.5	0,86	1500	235
FSŁ 1.6	0,91	1600	241
FSŁ 1.8	1,04	1800	256
FSŁ 1.9	1,09	1900	264
FSŁ 2.0	1,15	2000	271
FSŁ 2.2	1,26	2200	286

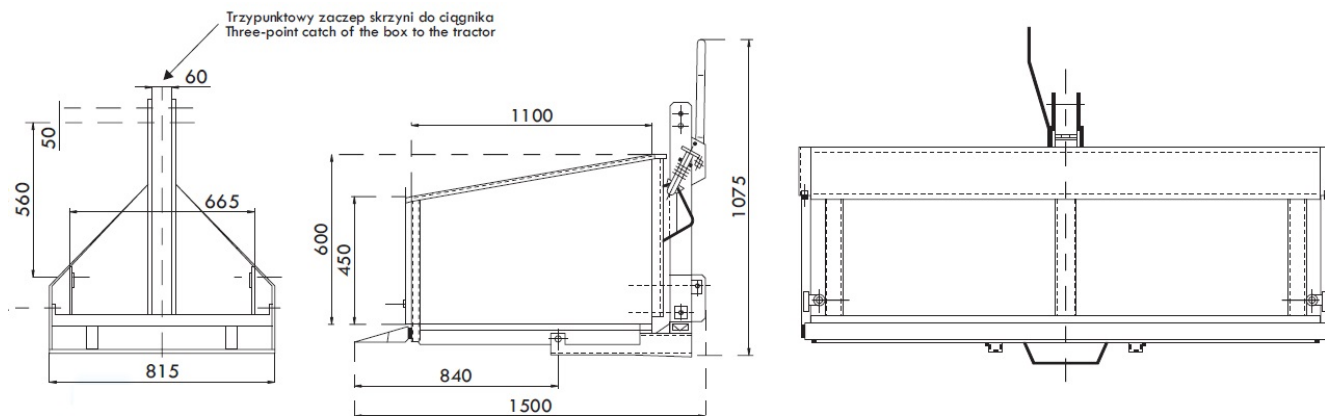


Skrzynia ładunkowa ISŁM1

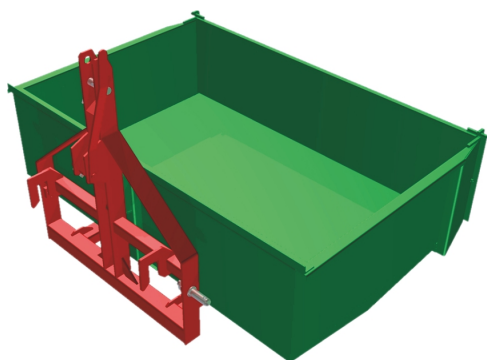

Typ/Type	Objęt. „m ³ ” Volume „m ³ ”	Szer. wewnętrzna Internal width	Masa kg Mass kg
ISŁM1 1.2	0,60	1200	189
ISŁM1 1.5	0,64	1500	196
ISŁM1 1.8	0,72	1800	209
ISŁM1 2.0	0,80	2000	222

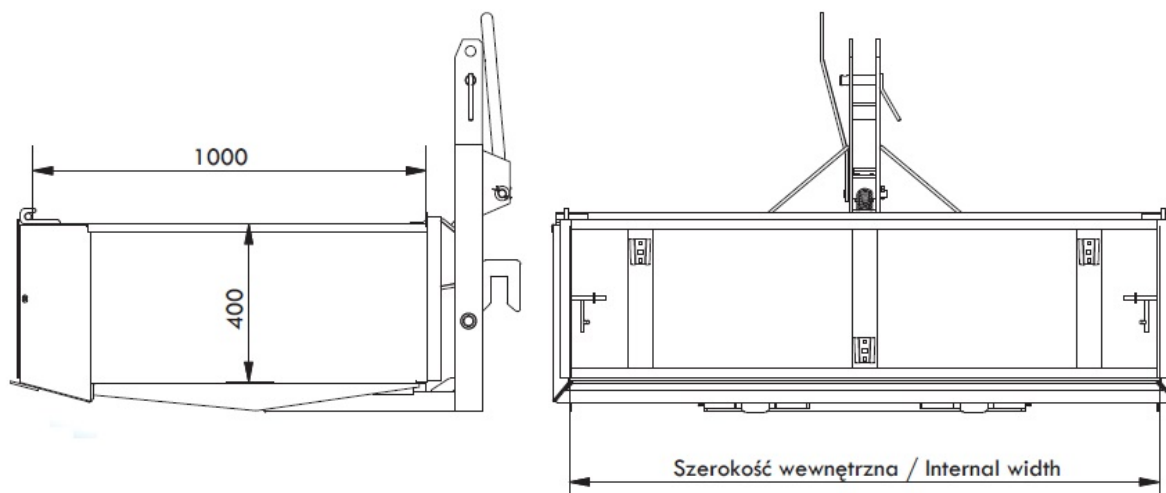



Skrzynia ładunkowa ISŁM2

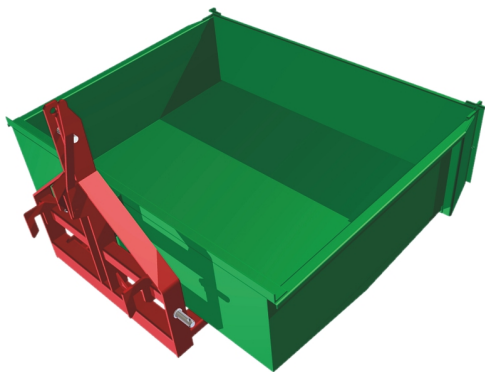


Typ/Type	Objęt. „m ³ ” Volume „m ³ ”	Szer. wewnętrzna Internal width	Masa kg Mass kg
ISLM2 1.5	0,75	1 500	250
ISLM2 1.6	0,80	1 600	263
ISLM2 1.8	0,90	1 800	276
ISLM2 2.0	1,00	2 000	288
ISLM2 2.2	1,10	2 200	300

○

π

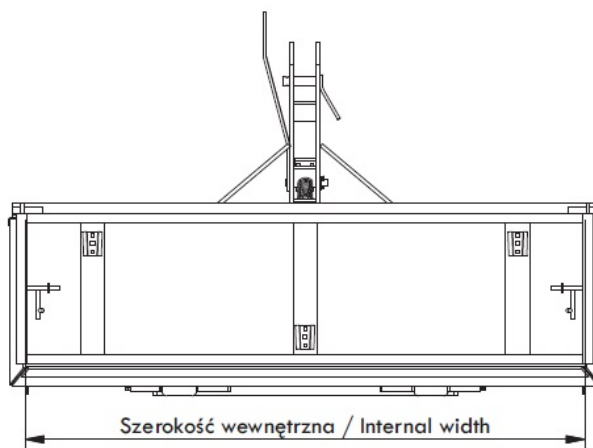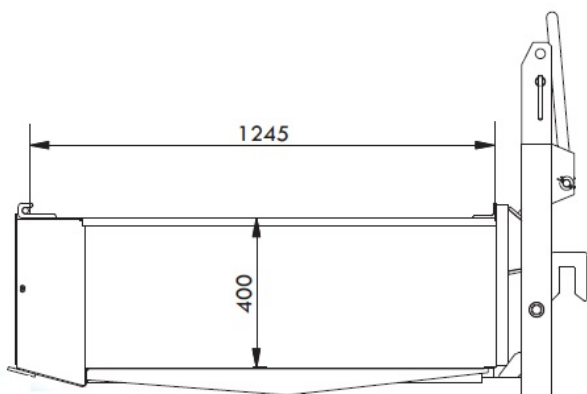

Skrzynia ładunkowa ISLM3

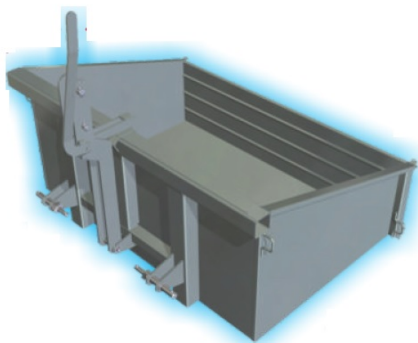

Typ/Type	Objęt. „m ³ ” Volume „m ³ ”	Szer. wewnętrzna Internal width	Masa kg Mass kg
ISLM3 1.2	0,65	1 200	172
ISLM3 1.5	0,82	1 500	194
ISLM3 1.8	0,98	1 800	220
ISLM3 2.0	1,09	2 000	235

